# GB10OE-0003




# **Specifications and Recommendations:**

Nominal Impedance	4Ω
Frequency Response (-3dB)	1.8kHz - 24kHz
Power Handling (RMS)*	100W
Power Handling (Peak)*	300W
Recommended Power (RMS)*	12W - 100W
Recommended High Pass Filter	2500Hz, 24dB/Oct
Fs	1500Hz

<sup>\*</sup>With Recommended High Pass Filter

## **Dimensions:**

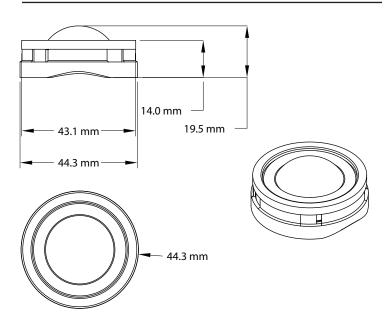

# **Fitment Information:**

#### **Verified Fit:**

• BMW models after 2003 that have tweeters in sail panel location.

## **Unverified but May Fit:**

Unknown

Please check your car's tweeter location and housing dimensions to confirm that the GB100E-0003 will fit.


# **Installation Steps and Precautions:**

## Removal of OE tweeter:

- Gently pull up the foam cover piece inside the BMW housing to expose the BMW tweeter.
  DOn't destroy the foam. You'll need it later.
- Then, carefully pry open the tabs holding the BMW tweeter in place.

# Installation of Audiofrog OE tweeter:

- Position the Audiofrog tweeter with the bevel toward the top and the holes are aligned with the BMW housing tabs.
- Then, gently press the Audiofrog tweeter securely into place.
- Press BMW foam back into place. Secure with additional glue, if necessary.

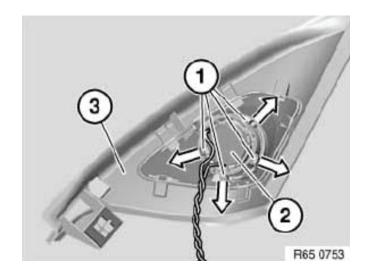

Limited Warranty (USA): Audiofrog GB Series products sold in the USA through authorized Audiofrog dealers are warranted to the original purchaser against defects in materials and workmanship for one year after the date of original purchase. They are warranted for an additional year if they are installed by an authorized Audiofrog dealer. Please save your receipt. A valid receipt from an authorized Audiofrog dealer is required for warranty service. If you purchased your GB Series products outside the USA, please consult your local distributor for warranty terms and conditions.